

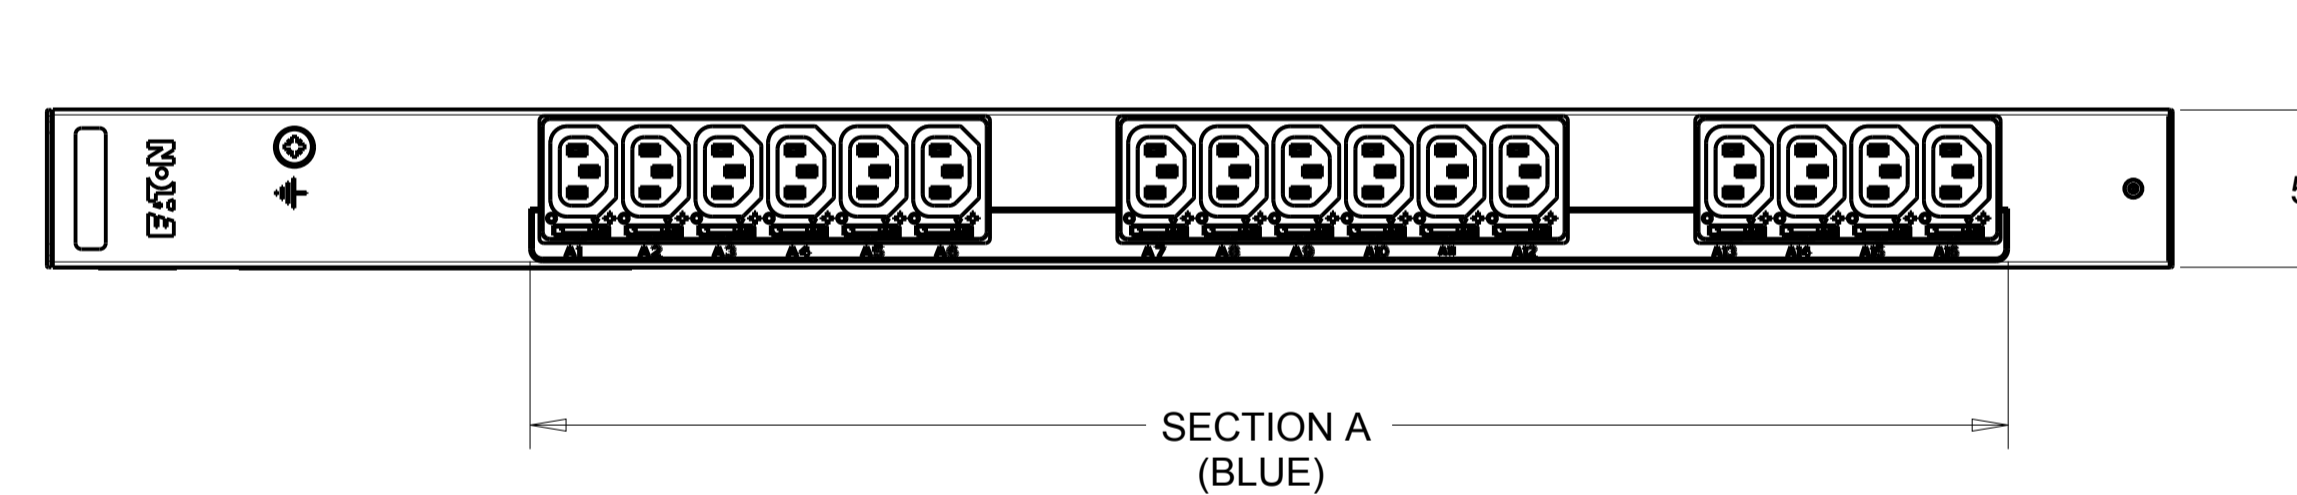


CABLE LENGTH SHOWN NOT TO SCALE

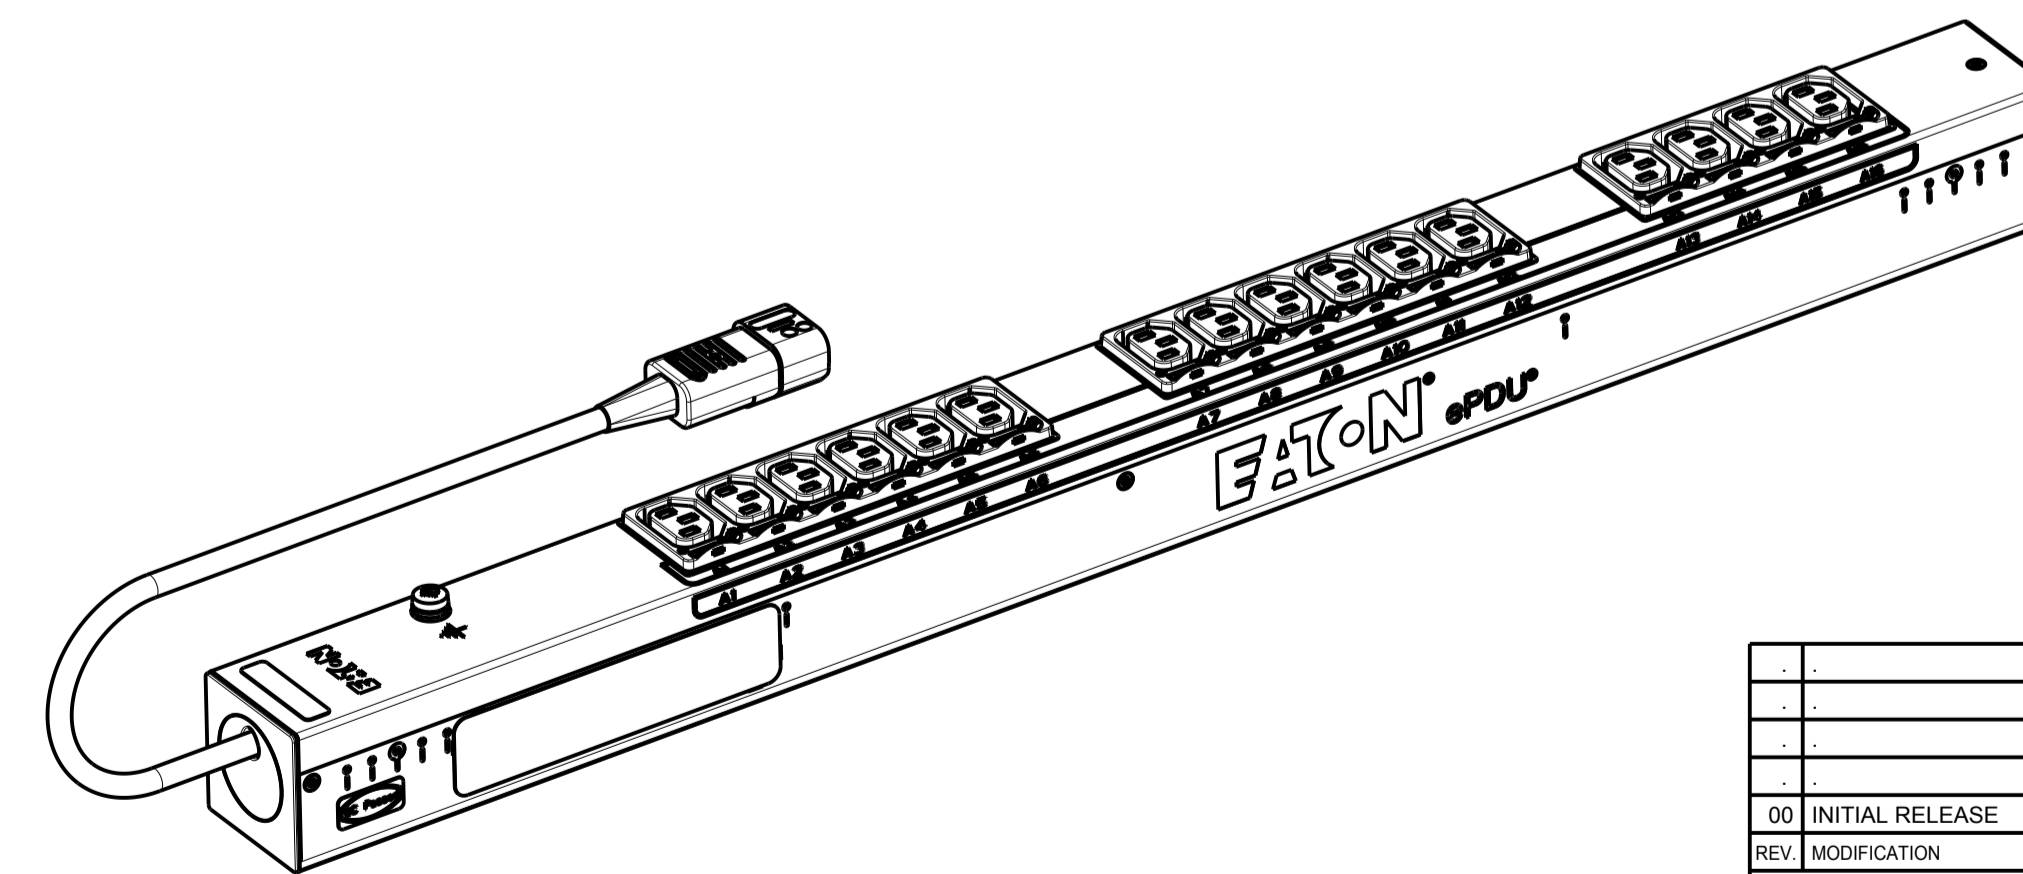

CIRCUIT SCHEMATIC

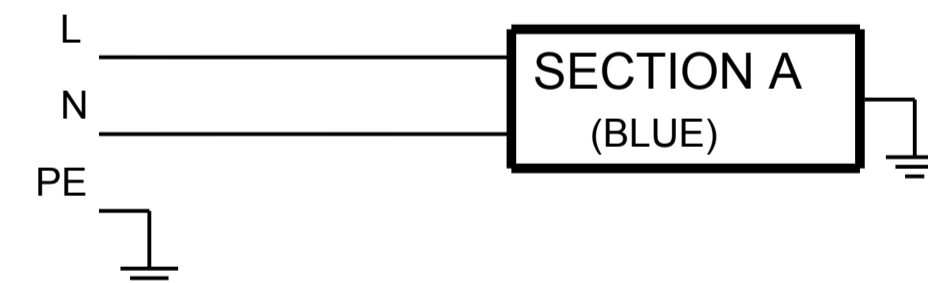

PICTORIAL VIEW
SCALE 0.400

EBAB03	G3 BASIC		
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
NONE	1Ø; 200-240V~; W+N+PE 50/60Hz 10A	(16) IEC 60320 C13 GRIP	0 TO 60 °C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 704MM WIDTH: 52 MM DEPTH: 53MM ALUMINIUM CHASSIS, BLACK MNT PATTERN SK-23919-Y1	IEC 60309 C14 10A 230V~ W+N+PE 1.5MM HO5 POWER CORD CABLE LENGTH: 3.0 M	200-240V~; 50/60Hz 10A PER C13 10A MAX TOTAL	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
NONE	NONE	STANDARD KSP014 - VERT INSTALLATION PACK OPTIONAL EMP001 - ENVIRONMENTAL PROBE	EBA3CP8FABE72AM

00	INITIAL RELEASE	12.05.2014	RA	MB
REV.	MODIFICATION	DATE	DESIGNER	VERIF.
		HEINEMANN PRODUCTS		N° MAG EBAB03
CH-1345 LE LIEU SWITZERLAND		ECHELLE / SCALE 4/10		DESSINE LE / DRAWN THE 12.05.2014
TRAITEMENT / FINISH N/A		VERIFIE PAR / VERIFIED BY MB		PAR / BY RA
MATERIE / MATERIAL N/A		NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT N/A		DIMENSIONS AND TOLERANCES IN MILLIMETERS
DESIGNATION EPDU BA 0U (C14 10A 1P)16XC13		NUMERO DU PLAN SK-34419-Y1		00
COTES A CONTROLER INSPECTION DIMENSIONS		COTES FONCTIONNELLES FUNCTIONAL DIMENSIONS		REV.
Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation. This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.				