


# Runtime: SRVL2KRILRK

APC Easy UPS On-Line, 2000VA, Lithium-ion, Rack/Tower 4U, 230V, 6 IEC C13 outlets, Intelligent Card Slot, Extended runtime, W/ rail kit  
Easy UPS On-Line

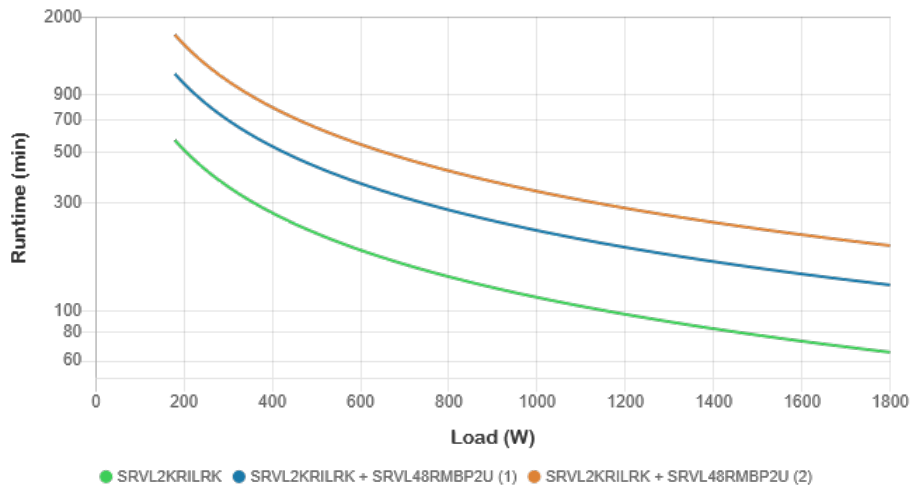

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Load / Runtime	180 W	200 W	400 W	600 W	800 W	1000 W	1200 W	1400 W	1600 W	1800 W
SRVL2KRILRK	9 h 27 min	8 h 35 min	4 h 31 min	3 h 5 min	2 h 21 min	1 h 54 min	1 h 36 min	1 h 23 min	1 h 13 min	1 h 5 min
1x SRVL2KRILRK										
1x SRVL48RMBP2U	18 h 38 min	16 h 55 min	8 h 54 min	6 h 6 min	4 h 39 min	3 h 46 min	3 h 11 min	2 h 45 min	2 h 25 min	2 h 10 min
1x SRVL2KRILRK										
2x SRVL48RMBP2U	27 h 46 min	25 h 13 min	13 h 17 min	9 h 6 min	6 h 57 min	5 h 38 min	4 h 45 min	4 h 6 min	3 h 37 min	3 h 14 min

<https://www.se.com/ie/en/products-runtime-graph/SRVL2KRILRK/apc-easy-ups-online-2000va-lithium-ion-rack-tower-4u-230v-6-iec-c13-outlets-intelligent-card-slot-extended-runtime-w-rail-kit/>