


Runtime: SRVL3KRILRK

APC Easy UPS On-Line, 3kVA, Lithium-ion, Rack/Tower 4U, 230V, 6 IEC C13 + 1 IEC C19 outlets, Intelligent Card Slot, Extended runtime, W/ rail kit

Easy UPS On-Line

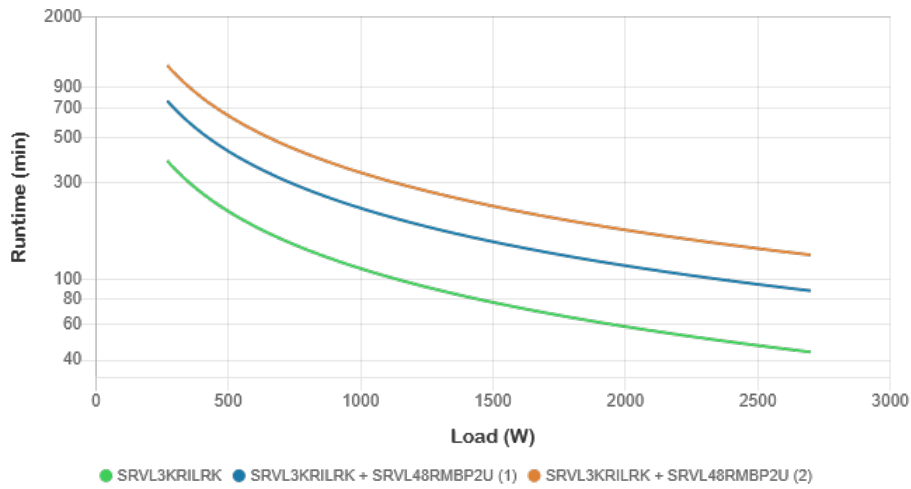

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Load / Runtime	270 W	500 W	1000 W	1500 W	2000 W	2500 W	2700 W
SRVL3KRILRK	6 h 26 min	3 h 37 min	1 h 53 min	1 h 17 min	58 min	47 min	43 min
1x SRVL3KRILRK 1x SRVL48RMBP2U	12 h 46 min	7 h 12 min	3 h 45 min	2 h 33 min	1 h 57 min	1 h 34 min	1 h 28 min
1x SRVL3KRILRK 2x SRVL48RMBP2U	19 h 7 min	10 h 47 min	5 h 38 min	3 h 51 min	2 h 56 min	2 h 22 min	2 h 12 min

<https://www.se.com/ie/en/products-runtime-graph/SRVL3KRILRK/apc-easy-ups-online-3kva-lithiumion-rack-tower-4u-230v-6-iec-c13-+-1-iec-c19-outlets-intelligent-card-slot-extended-runtime-w-rail-kit/>